


■ SPECIFICATION

- Voltage rating: 30V AC, DC
- Current Rating: 0.5A, AC, DC
- Withstand voltage: 200V AC/minute
- Contact resistance: 30mΩ max
- Insulation resistance: 100MΩ min
- Temperature range: -25° C ~ +85° C
- Color: Natural

■ HOUSING

- Material: Base, Nylon66/6T UL94V-0;
Contact area, Phosphor Bronze
Tin-plated/Gold-plated
- Wire Range: 32AWG
- Insulation O. D. : 0.38mm Max

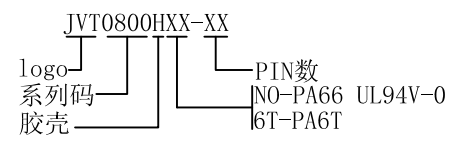

Poles	DIM				Poles	DIM			
	A	B	C	D		A	B	C	D
2	0.80	1.78	2.40	3.20	14	10.40	11.38	12.00	12.80
3	1.60	2.58	3.20	4.00	15	11.20	12.18	12.80	13.60
4	2.40	3.38	4.00	4.80	16	12.00	12.98	13.60	14.40
5	3.20	4.18	4.80	5.60	17	12.80	13.78	14.40	15.20
6	4.00	4.98	5.60	6.40	18	13.60	14.58	15.20	16.00
7	4.80	5.78	6.40	7.20	19	14.40	15.38	16.00	16.80
8	5.60	6.58	7.20	8.00	20	15.20	16.18	16.80	17.60
9	6.40	7.38	8.00	8.80	21	16.00	16.98	17.60	18.40
10	7.20	8.18	8.80	9.60	22	16.80	17.78	18.40	19.20
11	8.00	8.98	9.60	10.40					
12	8.80	9.78	10.40	11.20					
13	9.60	10.58	11.20	12.00					

GENERAL TOLERANCE	
0	±0.30
.0	±0.20
.00	±0.15
.000	±0.10

版本	变更内容	日期		单位	mm	比例	1:1	日期	20140317
----	------	----	--	----	----	----	-----	----	----------

核准	审核	绘图	品名	0.8mm刺破式HSG		
		李勇军	料号	JVT0800HXX-XX		
			图名	043	版本	A

乔业电子有限公司
CHYAO YEE CONNECTORS CO., L TD